





CLASSIC WALK PAVER DETAILS

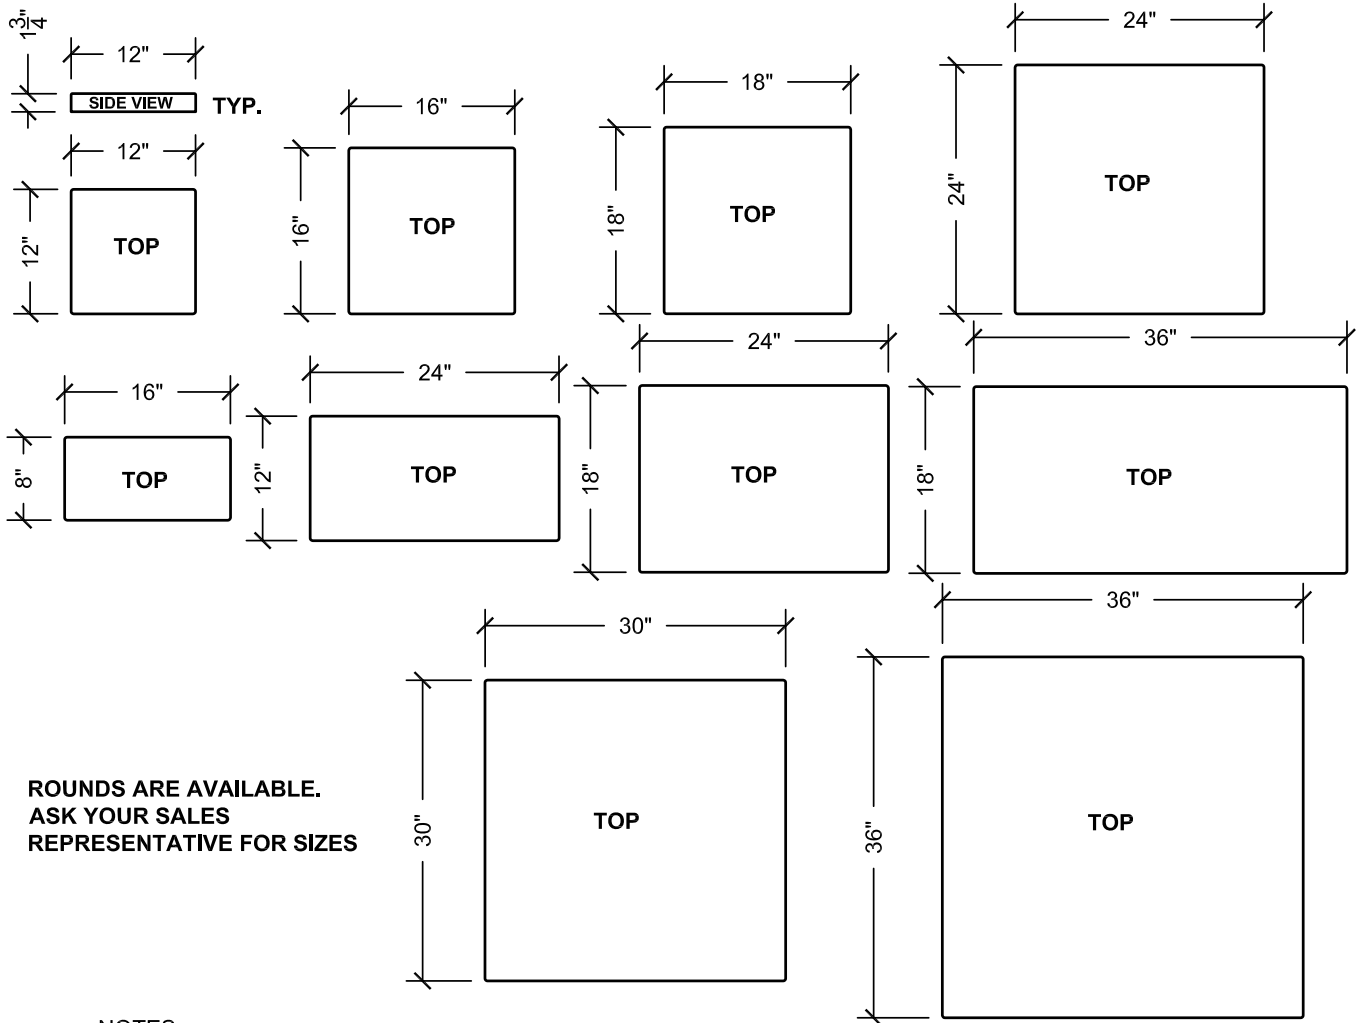

**ROUNDS ARE AVAILABLE.
ASK YOUR SALES
REPRESENTATIVE FOR SIZES**

NOTES:

1. PRECAST CONCRETE UNITS ARE INDIVIDUALLY HAND CAST. LENGTHS ARE APPROXIMATE. SOME VARIATIONS ARE EXPECTED. CLASSIC WALK PAVERS SHALL BE 1-3/4" THICK.
2. ALL CLASSIC WALK PAVERS SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 4,000 P.S.I.
3. PRECAST UNIT MAY BE CUT TO FIELD CONDITIONS. INSTALLATIONS TO BE COMPLETED IN ACCORDANCE WITH GENERALLY ACCEPTED MASONRY PRACTICES.
4. SLIP-RESISTANCE CLASSIC STIPPLE AND EXPOSED AGGREGATE FINISHES AVAILABLE.
5. CLASSIC WALK PAVERS ARE AVAILABLE IN TWELVE (12) STANDARD COLORS. CUSTOM COLORS AND SIZES ARE AVAILABLE UPON REQUEST.
6. ALL DIMENSIONS ARE NOMINAL. SEE SPECIFICATIONS FOR TOLERANCES.



CLASSIC WALK PAVERS - GENERAL DETAILS

SCALE: N.T.S.

